LED Area Illumination
Ambiente Smart Streetlight XL

Benefits

- Increases visibility and comfort
- Most advanced LED-technology
- High efficient design: up to 101 lm/W luminaire efficacy
- Outdoor ambient resistant -40°C to +60°C
- Integrated die cast aluminium housing ensures good thermal management maximizing life and LED performance
- Protected on against moisture, power dips or surges
- Same model for straight or bended poles, easy finetuning of angle
- Easy to install by one person
- Attractive design
- Mounting height: max. 18 meter
- Night-time dimming. Configurable dusk till dawn dimming schedule
- Self-controlled operating conditions:
  - Luminaire Intelligent Protection System (LIPS)
  - Active Overheat Protection (AOP)
  - Light Normalizer - No Lumen drop during lifetime
- Integrated EOS technology:
  - Plug-and-play self-organizing wireless network
  - Encrypted communication
  - Advised maximum spacing for network: 30 meter
- Intuitive control and analysis with the EOS Manager app:
  - User authentication and data encryption
  - Visual representation of your EOS network
  - Extensive configuration, information, and usage statistics
  - Share sensor information between EOS devices

Features

Productgroup	Ambiente
Power supply	Integrated
Input voltage	90 - 305 Vac | 127 - 431 VDC
Frequency	47 - 63 Hz
Input Power (default)	85 Watt
Lumen output (up to)	11069 lm
Efficacy (default)	130 lm/W
Colour temperature (CCT)	3000 | 4000 | 5700 K
Colour rendering index (CRI)	73+
Colour consistency	5 Macadam Ellipses
Upward light ratio (ULR)	< 1%
LED-count	32
Optic	PMMA
Beam optics	Street
Housing	Diecast aluminium / tempered safety glass
Mounting	Suits straight and angled poles
Pole diameter	60 - 76 mm
Dimensions	864 x 375 x 178 mm
Adjustable angle	-5° to +10°, bended or straight poles
EOS wireless technology	Yes
Motion sensor (PIR)	Optional (EOS technology)
Ingress protection	IP65
Mechanical impact resistance	IK08
Max SCx	0.3 m²
IEC safety class	I
Power factor	0.96 typical
AC harmonics	Less than 10% THD compliant to EN55015
Inrush current	65 A 1.2 ms
B-16A fuse	10 pcs
C-16A fuse	14 pcs
Operating temperature	-40°C to +60°C
Rated life (L80B10)	100,000+ hours

LED Area Illumination
Ambiente Smart Streetlight XL

Dimensions

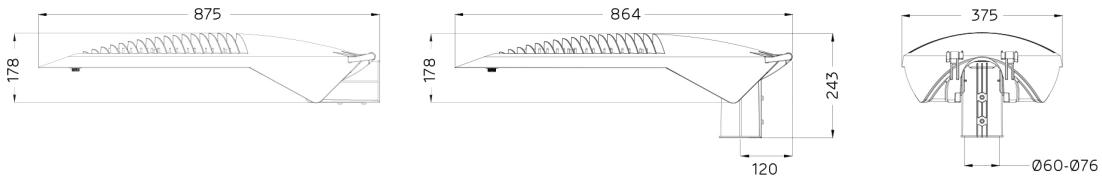

Optic

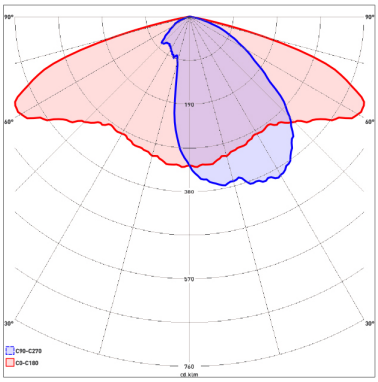

Ordering information

Name	SKU	Optic	Power	Lumen	Efficacy	CCT	CRI	Weight
Ambiente Smart Streetlight XL 32 LED								
Ambiente XL Streetlight 32LED 100W 3000K	20930	Street	85 W	11069 lm	130 lm/W	3000 | 40	73+	12.00 kg
Ambiente XL Streetlight 32LED 100W 4000K	20008	Street	85 W	11623 lm	116 lm/W	4000 K	70+	12.00 kg
Ambiente XL Streetlight 32LED 100W 4000K PIR	20285	Street	85 W	11623 lm	116 lm/W	4000 K	70+	12.00 kg
Ambiente XL Streetlight 32LED 100W 5700K	19994	Street	85 W	11069 lm	130 lm/W	5700 K	73+	12.00 kg
Ambiente XL Streetlight 32LED 100W 5700K PIR	20286	Street	100 W	11506 lm	115 lm/W	5700 K	73+	12.00 kg
Ambiente XL Streetlight 32LED 85W 4000K PIR	18546	Street	85 W	11069 lm	130 lm/W	4000 K	83+	12.00 kg
Ambiente XL Streetlight 32LED 85W 4000K PIR+14m cable	18077	Street	85 W	11069 lm	130 lm/W	4000 K	83+	12.00 kg

Accessories

15354 Ambiente. Pole adapter 76=>60mm. Galvanised steel.

19335 Ambiente XL. Wall bracket. 110mm-Ø76mm arm 0° angle. Steel (galvanized)

20193 Smart+ upgrade