


**Benefits**

- + Matt Black (RAL9005) body available on request.
- + Triac dimmable, 1-100%
- + Made in the Netherlands
- + 7 year warranty

Features

Colour	Matte white RAL 9016
Input voltage	220 - 240 Vac
Frequency	50 - 60 Hz
Input power	10 Watt
Lumen output	600 lm
Efficacy	up to 59 lm/W
Colour temperature (CCT)	3000 4000 K
Colour rendering index (CRI)	93
Colour Consistency (SDMC)	MacAdam step 3
Beam angle	80 °
Unified Glare Rating (UGR)	27
Dimensions	92 x Ø103 mm
Housing	Diecast Aluminium
Ingress protection	IP20
Impact protection	IK03
IEC safety class	II
Power factor	0.99
Ripple	<0.1 %
B-16A fuse	360 pcs
Operating temperature	-20°C - +45°C
Rated life (L80B50)	>70.000 hours

Dimensions

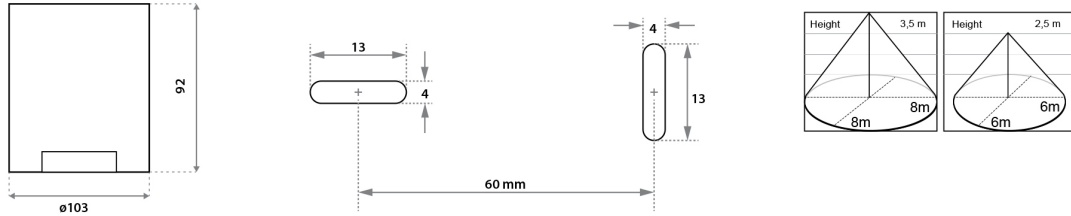

Ordering information

Name	SKU	Colour	Beam Angle	Power	Lumen	Efficacy	CCT	CRI
Circular 100. White. 3000K. 80°	20826	Matte white RAL 9016	80 °	10.3 W	600 lm	58 lm/W	3000 K	93
Circular 100. White. 4000K. 80°	20827	Matte white RAL 9016	80 °	10.1 W	600 lm	59 lm/W	4000 K	93

Compliances

EN60598

General requirements for luminaires

EN62031

General and safety requirements for light-emitting diode (LED) modules

EN62471

Standard for Photobiological safety of lamps and lamp systems

EN55015

Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment