Area Illumination
CubiQ Wall Mount

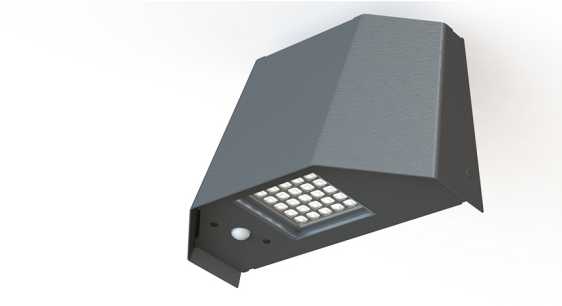

Features

Productgroup	CubiQ Wall Mount
Power supply	Integrated
Input voltage	100 - 305 Vac | 142 - 431 Vdc
Frequency	47 - 63 Hz
Input Power (max.)	50 Watt
Lumen output (up to)	5409 lm
Colour temperature (CCT)	3000 | 4000 | 5700 K
Colour rendering index (CRI)	83+ | 73+
Colour consistency	5 Macadam Ellipses
Upward light ratio (ULR)	< 1%
LED-count	13 | 25
Optic	PMMA
Beam optics	A-Symmetrical
Housing	Painted Aluminium (Dark Grey)
Mounting	Vertical flat surface
Dimensions	320 x 163 x 215 mm
EOS wireless technology	Yes
Motion sensor (PIR)	Available
Ingress protection	IP67
Mechanical impact resistance	IK08
IEC safety class	I
Power factor	0.95
AC harmonics	Less than 10% THD compliant to EN55015
Inrush current	50 A 350 µs
B-16A fuse	5 pcs
C-16A fuse	8 pcs
Operating temperature	-30 °C to +60 °C**
Rated life (L80B10)	100,000+ hours

Area Illumination
CubiQ Wall Mount

Dimensions



Ordering information

Name	SKU	Optic	Power	Lumen	Efficacy	CCT	CRI	Weight
CubiQ Wall Mount 13 LED								
Wall Mount. 20W default. 4000K. Dark Grey	19330	A-Symm.	20 W	2898 lm	119 lm/W	4000 K	83+	2.62 kg
Wall Mount. 20W default. 4000K. PIR. Dark Grey	19445	A-Symm.	20 W	2898 lm	119 lm/W	4000 K	83+	2.62 kg
Wall Mount. 20W default. 5700K. Dark Grey	19369	A-Symm.	20 W	2890 lm	118 lm/W	5700 K	73+	2.25 kg
Wall Mount. 20W default. 5700K. PIR. Dark Grey	19446	A-Symm.	20 W	2890 lm	119 lm/W	5700 K	73+	2.62 kg
CubiQ Wall Mount 25 LED								
Wall Mount. 40W default. 4000K. Dark Grey	19332	A-Symm.	40 W	5534 lm	115 lm/W	4000 K	83+	2.25 kg
Wall Mount. 40W default. 4000K. PIR. Dark Grey	19334	A-Symm.	40 W	5534 lm	115 lm/W	4000 K	83+	2.62 kg
Wall Mount. 40W default. 5700K. Dark Grey	19331	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.25 kg
Wall Mount. 40W default. 5700K. PIR. Dark Grey	19333	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.62 kg
Wall Mount. 40W default. 5700K. PIR. White	19953	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.62 kg
Wall Mount. 40W default. 5700K. White	20140	A-Symm.	40 W	5409 lm	115 lm/W	5700 K	73+	2.62 kg