




Benefits

- + Light fitting protection IP66 / IP69
- + High temperature resistance in a range from 25°C to 50°C
- + Life time: 50,000 / L90B10
- + High mechanical resistance IK10
- + Variable suspension pitch; optional installation of light fitting even on an existing structure on which the original light fittings were suspended
- + Simple and fast mounting thanks to original cables and flexible mounting pitch at the light fitting
- + Easy cleaning and maintenance without need of replacing the light sources
- + Eliminated risk of mechanical and electrostatic damage to LED chips
- + Optional delivery in dimmable version
- + Certificates: ENEC, CB, HACCP

Features

Productgroup	Innova Easy Install
Power supply	Integrated
Input voltage	198 - 264 Vac
Frequency	50 - 60 Hz
Colour temperature (CCT)	4000 Kelvin
Colour rendering index (CRI)	> 80
Housing	PC (high mechanical resistance, UV stability)
Mounting	Surface mounted
Connection	Easy 3 wire plug & play connector
Ingress protection	IP66
Impact protection	IK10
Ignition temperature	850 °C
IEC safety class	I
Inrush current	45 A 100 µS
B-16A fuse	30 pcs
C-16A fuse	51 pcs
Operating temperature	-25° to +45°C
Rated life (L90B10)	50,000 hours

Optic

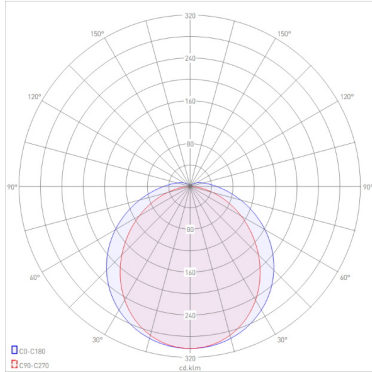

Ordering information

Name	SKU	Power	Lumen	Efficacy
Easy Install 1x3p End				
Easy Install 1x3p End - 1,2m - ABS Chem. Res.- 5710Lm - 4000K	18028	43 W	5710 Lm	133 Lm/W
Easy Install 1x3p End - 1,2m - PC - 3960Lm - 4000K	18566	30 W	3960 Lm	132 Lm/W
Easy Install 1x3p End - 1,2m - PC - 5710Lm - 4000K	18567	43 W	5710 Lm	133 Lm/W
Easy Install 1x3p End - 1,5m - ABS Chem. Res.- 7170Lm - 4000K	18561	54 W	7170 Lm	133 Lm/W
Easy Install 1x3p End - 1,5m - PC - 4990Lm - 4000K	18029	37 W	4990 Lm	135 Lm/W
Easy Install 1x3p End - 1,5m - PC - 7170Lm - 4000K	18568	54 W	7170 Lm	133 Lm/W
Easy Install 2x3p Center				
Easy Install 2x3p Center - 1,2m - ABS Chem. Res.- 5710Lm - 4000K	18559	43 W	5710 Lm	133 Lm/W
Easy Install 2x3p Center - 1,2m - PC - 3960Lm - 4000K	18562	30 W	3960 Lm	132 Lm/W
Easy Install 2x3p Center - 1,2m - PC - 5710Lm - 4000K	18563	43 W	5710 Lm	133 Lm/W
Easy Install 2x3p Center - 1,5m - ABS Chem. Res.- 7170Lm - 4000K	18560	54 W	7170 Lm	133 Lm/W
Easy Install 2x3p Center - 1,5m - PC - 4990Lm - 4000K	18564	37 W	4990 Lm	135 Lm/W
Easy Install 2x3p Center - 1,5m - PC - 7170Lm - 4000K	18565	54 W	7170 Lm	133 Lm/W

Accessoires

18031	LEDLight Batten Innova - Connection cable 1m - 3x1,5mm - Male-Wire
18569	LEDLight Batten Innova - Hook-up cable 1m - 3x1,5mm - Male-Female
18571	LEDLight Batten Innova - Connection cable 3m - 3x1,5mm - Male-Wire
18570	LEDLight Batten Innova - Hook-up cable 3m - 3x1,5mm - Male-Female