




Benefits

- + Light fitting protection IP66
- + Maximum ambient temperature up to 45°C
- + Lifetime: 50,000 hours / L90B10
- + Up to 45% lower electricity consumption when compared to tubes T5
- + Constant luminous flux even in ambient temperature of -40°C
- + In DALI version possibility of constant luminous flux for whole lifetime (CLO)
- + Certification: HACCP

Features

Productgroup	Prima Led
Power supply	TCl driver integrated
Input voltage	198 - 264 Vac
Frequency	50 - 60 Hz
Colour temperature (CCT)	4000 Kelvin
Colour rendering index (CRI)	> 80
Housing	PC (high mechanical resistance, UV stability)
Mounting	Surface mounted
Connection	Terminal block integrated
Ingress protection	IP66
Impact protection	IK10
Ignition temperature	850 °C
IEC safety class	I
Inrush current	45 A 100 µS
B-16A fuse	30 pcs
C-16A fuse	51 pcs
Operating temperature	-25° to +40°C
Rated life (L90B10)	50,000 hours

Optic

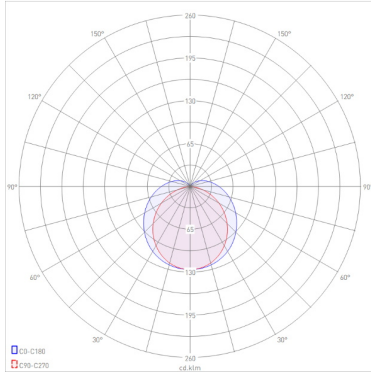

Ordering information

Name	SKU	Power	Lumen	Efficacy
Prima LED - 0,6m - PC - 1950Lm - 4000K	19952	15 W	1950 Lm	130 Lm/W
Prima LED - 1,2m - ABS Chem. Res.- 5650Lm - 4000K	18552	43 W	5650 Lm	131 Lm/W
Prima LED - 1,2m - PC - 3920Lm - 4000K	18554	30 W	3920 Lm	131 Lm/W
Prima LED - 1,2m - PC - 5650Lm - 4000K	18555	43 W	5650 Lm	131 Lm/W
Prima LED - 1,5m - ABS Chem. Res.- 7090Lm - 4000K	18553	54 W	7090 Lm	131 Lm/W
Prima LED - 1,5m - PC - 4940Lm - 4000K	18556	37 W	4940 Lm	134 Lm/W
Prima LED - 1,5m - PC - 7090Lm - 4000K	18557	54 W	7090 Lm	131 Lm/W
Prima LED - 1,5m - PC - High Temp - 4780Lm - 4000K	18558	33 W	4780 Lm	145 Lm/W