




**Benefits**

- + Light fitting protection IP66
- + Maximum ambient temperature up to 45°C
- + Lifetime: 50,000 hours / L90B10
- + Up to 45% lower electricity consumption when compared to tubes T5
- + Constant luminous flux even in ambient temperature of -40°C
- + In DALI version possibility of constant luminous flux for whole lifetime (CLO)
- + Certification: HACCP

**Features**

|                              |   |
|------------------------------|---|
| Productgroup                 | Prima Led                                     |
| Power supply                 | TCl driver integrated                         |
| Input voltage                | 198 - 264 Vac                                 |
| Frequency                    | 50 - 60 Hz                                    |
| Colour temperature (CCT)     | 4000 Kelvin                                   |
| Colour rendering index (CRI) | > 80  |
| Housing                      | PC (high mechanical resistance, UV stability) |
| Mounting                     | Surface mounted                               |
| Connection                   | Terminal block integrated                     |
| Ingress protection           | IP66  |
| Impact protection            | IK10  |
| Ignition temperature         | 850 °C  |
| IEC safety class             | I   |
| Inrush current               | 45 A 100 µS                                   |
| B-16A fuse                   | 30 pcs  |
| C-16A fuse                   | 51 pcs  |
| Operating temperature        | -25° to +40°C                                 |
| Rated life (L90B10)          | 50,000 hours                                  |

Optic

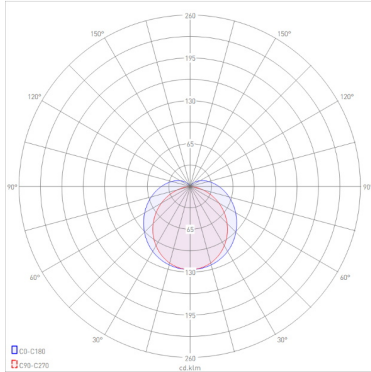

Ordering information

| Name   | SKU   | Power | Lumen   | Efficacy |
|--|-------|-------|---------|----------|
| Prima LED - 0,6m - PC - 1950Lm - 4000K             | 19952 | 15 W  | 1950 Lm | 130 Lm/W |
| Prima LED - 1,2m - ABS Chem. Res.- 5650Lm - 4000K  | 18552 | 43 W  | 5650 Lm | 131 Lm/W |
| Prima LED - 1,2m - PC - 3920Lm - 4000K             | 18554 | 30 W  | 3920 Lm | 131 Lm/W |
| Prima LED - 1,2m - PC - 5650Lm - 4000K             | 18555 | 43 W  | 5650 Lm | 131 Lm/W |
| Prima LED - 1,5m - ABS Chem. Res.- 7090Lm - 4000K  | 18553 | 54 W  | 7090 Lm | 131 Lm/W |
| Prima LED - 1,5m - PC - 4940Lm - 4000K             | 18556 | 37 W  | 4940 Lm | 134 Lm/W |
| Prima LED - 1,5m - PC - 7090Lm - 4000K             | 18557 | 54 W  | 7090 Lm | 131 Lm/W |
| Prima LED - 1,5m - PC - High Temp - 4780Lm - 4000K | 18558 | 33 W  | 4780 Lm | 145 Lm/W |