

**Benefits**


- + Perfectly suitable for environments where a true colour is vital (CRI up to 96)
- + compatible with most common 3 phase tracks
- + Passive heat sink, no moving parts
- + Directional and 359° rotatable
- + Available as spot, medium and flood for the ideal highlight
- + High lumen output versions available on request
- + No-dim or dimmable (DALI / 0-10V) versions available on request
- + Flexible Lumen packages selectable by changing driver settings

Features

Productgroup	Silver 3 Phase Track directional
Colour	Matte white RAL 9016
Power supply	TCl driver integrated
Input voltage	110 - 240 Vac on TCl driver
Frequency	50 - 60 Hz
Input power	31.7 Watt
Colour Consistency (SDMC)	MacAdam step 3
Housing	Diecast Aluminium
Ingress protection	IP20
Impact protection	IK03
IEC safety class	I
Power factor	0.95
Inrush current	5A 50µS
B-16A fuse	50
Operating temperature	-20° to +45°C



Dimensions

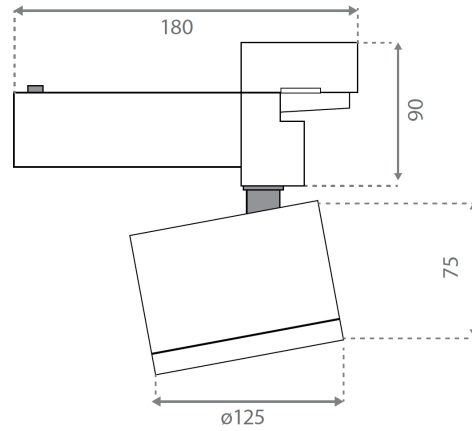

Ordering information

Name	SKU	Colour	Beam Angle	Power	Lumen	Efficacy	CCT	CRI
Silver 3 Phase Track directional Matte white RAL 9016								
3phase track 3000K. 18°. 32W. 2150Lm. CRI97.	16105	Matte white RAL 9016	18 °	31.7 W	2500 lm		3000 K	96
3phase track 3000K. 18°. 32W. 3000Lm. CRI80.	16099	Matte white RAL 9016	18 °	31.7 W	3000 lm	95 lm/W	3000 K	83
3phase track 3000K. 37°. 32W. 2150Lm. CRI97.	16106	Matte white RAL 9016	37 °	31.7 W	2500 lm		3000 K	96
3phase track 3000K. 37°. 32W. 3000Lm. CRI80.	16100	Matte white RAL 9016	37 °	31.7 W	3000 lm	95 lm/W	3000 K	83
3phase track 3000K. 60°. 32W. 2150Lm. CRI97.	16107	Matte white RAL 9016	80 °	31.7 W	2500 lm		3000 K	96
3phase track 3000K. 60°. 32W. 3000Lm. CRI80.	16101	Matte white RAL 9016	80 °	31.7 W	3000 lm	95 lm/W	3000 K	83
3phase track 4000K. 18°. 32W. 3400Lm. CRI80.	16102	Matte white RAL 9016	18 °	31.7 W	3400 lm	107 lm/W	4000 K	83
3phase track 4000K. 37°. 32W. 3400Lm. CRI80.	16103	Matte white RAL 9016	37 °	31.7 W	3400 lm	107 lm/W	4000 K	83
3phase track 4000K. 60°. 32W. 3400Lm. CRI80.	16104	Matte white RAL 9016	80 °	31.7 W	3400 lm	107 lm/W	4000 K	83

Compliances

EN 60598

EN 62031

EN 62471

EN 55015

Luminaires - Part 1: General requirements and tests

LED modules for general lighting - Safety specifications

Photobiological safety of lamps and lamp systems

Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment