LED Interior Illumination
Silver 3phase track

Benefits

- Perfectly suitable for environments where a true colour is vital (CRI up to 96)
- compatible with most common 3 phase tracks
- Passive heat sink, no moving parts
- Directional and 359° rotatable
- Available as spot, medium and flood for the ideal highlight
- High lumen output versions availeble on request
- No-dim or dimmable (DALI / 0-10V) versions available on request
- Flexible Lumen packages selectable by changing driver settings

Features

Productgroup	Silver 3 Phase Track directional
Colour	Matte white RAL 9016
Power supply	TCI driver integrated
Input voltage	110 - 240 Vac on TCI driver
Frequency	50 - 60 Hz
Input power	31.7 Watt
Colour Consistency (SDMC)	MacAdam step 3
Housing	Diecast Aluminium
Ingress protection	IP20
Impact protection	IK03
IEC safety class	I
Power factor	0.95
Inrush current	5A 50µS
B-16A fuse	50
Operating temperature	-20° to +45°C

IP20

LED Interior Illumination
Silver 3phase track

Dimensions

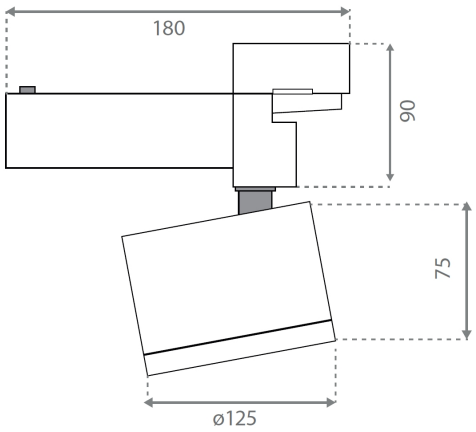

Ordering information

Name	SKU	Colour	Beam Angle	Power	Lumen	Efficacy	CCT	CRI
Silver 3 Phase Track directional Matte white RAL 9016								
3phase track 3000K. 37°. 3000Lm. 32W. CRI80.	16100	Matte white RAL 9016	37 °	31.7 W	3000 lm	95 lm/W		
3phase track 3000K. 60°. 3000Lm. 32W. CRI80.	16101	Matte white RAL 9016	60 °	31.7 W	3000 lm	95 lm/W		
3phase track 4000K. 37°. 3400Lm. 32W. CRI80.	16103	Matte white RAL 9016	37 °	31,7 W	3400 lm	107 lm/W	4000 K	
3phase track 4000K. 60°. 3400Lm. 32W. CRI80.	16104	Matte white RAL 9016	60 °	31.7 W	3400 lm	107 lm/W	4000 K	

Compliances

EN 60598	Luminaires - Part 1: General requirements and tests
EN 62031	LED modules for general lighting - Safety specifications
EN 62471	Photobiological safety of lamps and lamp systems
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

All product, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Photos and pictures are for illustration purpose only