


**Benefits**

- + Perfectly suitable for environments where a true colour is vital (CRI 97)
- + White polycarbonate diffuser when light is off
- + Passive heat sink, no moving parts
- + Fits in standard 185-205 mm apertures
- + Low recess depth of 80 mm
- + Waterproof front
- + Optional DALI, 0-10V or EOS dimmable driver

Features

| | |
|------------------------------|-----------------------------|
| Productgroup | Silver Shop 185 V3 |
| Colour | Matte white RAL 9016 |
| Power supply | TCl driver included |
| Input voltage | 110 - 240 Vac on TCl driver |
| Frequency | 50 - 60 Hz |
| Colour rendering index (CRI) | 97 |
| Colour Consistency (SDMC) | MacAdam step 3 |
| Beam angle | 80 ° |
| Unified Glare Rating (UGR) | 24.5 |
| Dimensions | 230 mm |
| Housing | Diecast Aluminium |
| Ingress protection | IP20 / IP44 |
| Impact protection | IK03 |
| IEC safety class | II |
| Power factor | 0.95 |
| Inrush current | 5A 50µS |
| B-16A fuse | 50 |
| Operating temperature | -20° to +45°C |
| Rated life (L80B50) | 70,000 hours |

Dimensions

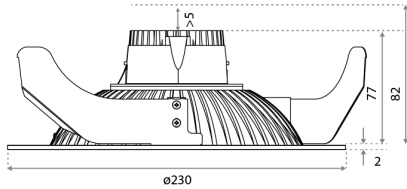

Ordering information

| Name | SKU | Colour | Beam Angle | Power | Lumen | Efficacy | CCT | CRI |
|---------------------------------------|-------|----------------------|------------|--------|---------|----------|--------|-----|
| Silver Shop 185 V3 3000K CRI97 1250Lm | 19357 | Matte white RAL 9016 | 80 ° | 13.8 W | 1250 lm | 91 lm/W | 3000 K | 97 |
| Silver Shop 185 V3 3000K CRI97 2250Lm | 19358 | Matte white RAL 9016 | 80 ° | 20,6 W | 2250 lm | 86 lm/W | 3000 K | 97 |
| Silver Shop 185 V3 4000K CRI97 1350Lm | 19359 | Matte white RAL 9016 | 80 ° | 13.8 W | 1350 lm | 97 lm/W | 4000 K | 97 |
| Silver Shop 185 V3 4000K CRI97 2400Lm | 19360 | Matte white RAL 9016 | 80 ° | 20,6 W | 2400 lm | 92 lm/W | 4000 K | 97 |

Compliances

IEC 60598

IEC 62031

IEC 62471

EN 55015

General requirements for luminaires

LED modules for general lighting - Safety specifications

Photobiological safety of lamps and lamp systems

Limits and Methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.