LED Interior Illumination
Silver 185 fixed

Benefits

- Perfectly suitable for environments where a true colour is vital
- White polycarbonate diffuser when light is off
- Passive heat sink, no moving parts
- Fits in standard 185-205 mm apertures
- Waterproof front
- Optional DALI, 0-10V or EOS dimmable driver
- Flexible Lumen packages slectable by changing driver settings

Features

Productgroup	Silver 185
Colour	Matte white RAL 9016
Power supply	TCI driver included
Input voltage	110 - 240 Vac on TCI driver
Frequency	50 - 60 Hz
Colour temperature (CCT)	3000 | 4000 K
Colour rendering index (CRI)	82
Colour Consistency (SDMC)	MacAdam step 3
Beam angle	80 °
Dimensions	230 x 85 mm
Housing	Diecast Aluminium
Ingress protection	IP20 / IP44
Impact protection	IK03
IEC safety class	II
Power factor	0.95
Ripple	<3 %
Operating temperature	-20° to +45°C
Rated life (L80B50)	105,000 hours

LED Interior Illumination
Silver 185 fixed

Dimensions

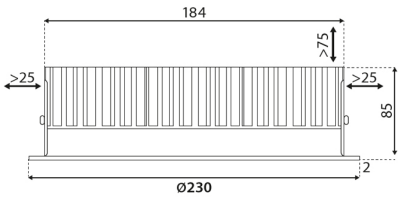



185 - 205 mm (hard mineral plates)
185 mm (soft mineral plates)

Ordering information

Name	SKU	Colour	Beam Angle	Power	Lumen	Efficacy	CCT	CRI
Silver 185 fixed Matte white RAL 9016								
Silver 185 fixed 3000K - 3000lm - No Dim	19559	Matte white RAL 9016	80 °	27 W	3000 lm	111 lm/W	3000 K	82
Silver 185 fixed 3000K - 5000lm - No Dim	19560	Matte white RAL 9016	80 °	50.5 W	5000 lm	99 lm/W	3000 K	82
Silver 185 fixed 4000K - 3400lm - No Dim	19561	Matte white RAL 9016	80 °	27 W	3400 lm	126 lm/W	4000 K	82
Silver 185 fixed 4000K - 5700lm - No Dim	19562	Matte white RAL 9016	80 °	50.5 W	5700 lm	113 lm/W	4000 K	82

Accessories

14239	Interior. Correction ring - White 185 - 290x185

LED Interior Illumination
Silver 185 fixed

Compliances

IEC 60598	General requirements for luminaires
IEC 62031	LED modules for general lighting - Safety specifications
IEC 62471	Photobiological safety of lamps and lamp systems
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

All product, product specifications and data are subject to change without notice to improve reliability, function, design or otherwise. Photos and pictures are for illustration purpose only